

# DHI-ITC215-PW6M-IRLZF-B

## Access ANPR Camera



- Adopts high-performance CMOS image sensor and processor for in-depth extraction and analysis of vehicle information 24/7
- Embraces deep learning algorithm for accurate recognition of vehicles without license plate, and vehicle model, vehicle logo, vehicle series, vehicle color, and more
- Various signal, data and communication interfaces; supports connecting to extra devices, such as barrier
- Built-in LED illuminator for simplified installation
- Motorized vari-focal lens, easy for installation and commissioning
- Integrated design with low power consumption, and IP67 protection grade

### System Overview

The short range access ANPR camera adopts high-performance CMOS image sensor and processor for in-depth extraction and analysis of vehicle information 24/7. In addition, it embraces deep learning algorithm for accurate recognition of vehicles without license plate, vehicle model, vehicle logo, vehicle series, vehicle color, and more. The camera is extensively applied to vehicle detection and recognition in scenarios such as parking lots, community roads, and more. The access ANPR kit is extensively applied to vehicle detection and recognition in scenarios such as parking lots, community roads, and more.

### Functions

#### High-quality image

Industry-specific CMOS image sensor with high sensitivity, high SNR and excellent WDR provides lifelike images 24/7.

#### Impressive performance

High-performance CPU processor helps extract and analyze information of motor and non-motor vehicles in real-time, providing vehicle feature details for business decision-making.

#### High-level protection

Integrated design with low power consumption, built-in lightning protection module, and IP67 protection grade, suitable for various harsh environments.

#### Easy installation

Built-in LED illuminator and motorized vari-focal lens, providing ease of installation and commissioning.

### Technical Specification

#### Basic

|                          |   |
|--------------------------|---|
| Illuminator Number       | 6 IR illuminators, brightness adjustable  |
| Image Sensor             | 1/2.8" CMOS   |
| Image Resolution         | 1920 × 1080 (OSD black strip excluded)  |
| Video Resolution         | Main stream: 1080P (1920 × 1080)/720P (1280 × 720)<br>Sub stream: 720P (1280 × 720)/D1 (704 × 576, 704 × 480)/CIF (352 × 288, 352 × 240)  |
| Video Frame Rate         | PAL: Main stream (1920 × 1080@25fps, 1280 × 720@25fps), sub stream (1280 × 720@25fps, 704 × 576@25fps, 352 × 288@25fps)<br>NTSC: Main stream (1920 × 1080@30fps, 1280 × 720@30fps), sub stream (1280 × 720@30fps, 704 × 408@30fps, 352 × 240@30fps) |
| Bit Rate                 | H.264B: 32Kbps–32768Kbps<br>H.264M: 32Kbps–32768Kbps<br>H.264H: 32Kbps–32768Kbps<br>H.265: 32Kbps–32768Kbps<br>MJPEG: 512Kbps–65536Kbps   |
| Video Compression        | H.264B/H.264M/H.264H/H.265/MJPEG  |
| Picture Encoding Format  | JPEG  |
| Noise Reduction          | 3DNR  |
| White Balance            | Full auto, auto color temperature range, customized color temperature   |
| Electronic Shutter Speed | 1/50–1/10000, auto or manual  |
| WDR                      | 96 db   |
| Edge Enhancement         | Yes   |
| Exposure Mode            | Full auto, customized auto, customized  |

|                                       |  |
|---------------------------------------|--|
| Iris Control                          | Auto iris (W: 1.6–T: 3.3)  |
| <b>Performance</b>                    |  |
| Trigger Mode                          | Video detection; I/O coil; video detection and I/O coil  |
| Shutter                               | Single shutter   |
| Storage                               | 1 built-in TF card port. Supports Kingston 16G, 32G, 64G, and 128G; Dahua 16G, 32G, 64G, and 128G; SanDisk 16G, 32G, 64G, and 128G         |
| Image Tampering Prevention            | Yes. Video/picture can be checked through watermark and verification   |
| Field of View                         | Horizontal: 108.1° (W)–30.3° (T);<br>Vertical: 56.3° (W)–17.1° (T);<br>Diagonal: 130.9° (W)–34.8° (T)                                      |
| Illumination Distance                 | 12 m (39.37 ft)  |
| Alarm Event                           | Alarm in the case of no storage card, not enough storage space, storage card error, network disconnection, IP conflict, and illegal access |
| Security                              | Authorized username and password, MAC address binding, HTTPS encryption, IEEE 802.1x, and network access control                           |
| OSD Overlay                           | Supports overlay of time, address (position of channel), lane (number/direction), plate (number and color), vehicle (speed, color, type)   |
| Automatic Network Replenishment (ANR) | Yes. Platform/FTP  |
| Auto Registration                     | Yes  |

## Intelligence

|                         |  |
|-------------------------|--|
| Vehicle Detection       | Vehicle capture rate ≥99%  |
| Vehicle Recognition     | Supports recognizing vehicle type, vehicle logo, vehicle series, vehicle color, license plate, features of driver and front-seat passenger, and vehicle without plate. Vehicle recognition rate ≥95% |
| Video Metadata          | Yes  |
| Intelligent Track Frame | Intelligent frame display. Supports displaying vehicle plate and vehicle path  |

## Port

|               |  |
|---------------|--|
| Lens Mount    | Φ14  |
| Analog Output | 1  |
| Network       | 1 100/1000M Ethernet port (RJ-45)  |
| RS-485        | 2  |
| RS-232        | 1  |
| Alarm Input   | 3, optocoupler input (on-off input)  |
| Alarm Output  | 3 ports. 2-channel optocoupler output, 1-channel relay output, which can connect to devices such as barriers |
| Audio Input   | 1-channel RCA port   |
| Audio Output  | 1-channel RCA port   |


## General

|                       |   |
|-----------------------|---|
| Power Supply          | 12V DC, 24V AC, PoE   |
| Power Consumption     | < 20W   |
| Operating Temperature | –30°C to +65°C (–22°F to +149 °F)                                   |
| Operating Humidity    | 10%RH–90%RH (no condensation)                                       |
| Casing                | Metal and plastic   |
| Protection Grade      | IP67  |
| Dimensions            | 486.7 mm × 124.3 mm × 185.5 mm (19.16" × 4.89" × 7.30") (L × W × H) |
| Net Weight            | 1.9 kg (4.19 lb)  |
| Gross Weight          | 3.3 kg (7.28 lb)  |
| Installation          | Installed with bracket  |
| Lens                  | 3.2 mm –10.5 mm   |

## Ordering Information

| Type       | Model                   | Description  |
|------------|-------------------------|--|
| 2MP Camera | DHI-ITC215-PW6M-IRLZF-B | 2MP short range access ANPR camera (850nm built-in IR illuminator) |

## Installation

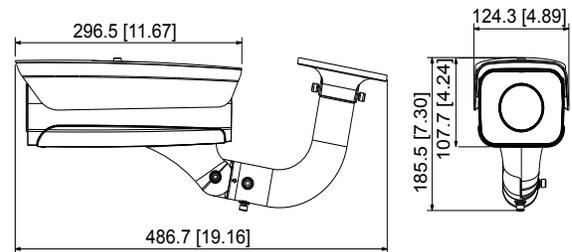

## Dimensions (mm[inch])

